EL13A-1 - 12Volt Alternating Flasher

- Bracket or Socket Mountable
- Precise Square Wave I.C. Controller
- High Temperature Plastic Enclosure
- Standard Three Terminal I.S.O. Pin-out
- Solid State Relay Driver Technology
- Highest O.E.M. Quality Printed Circuit Board Materials
- Quality and Durability Equal to O.E.M. Products

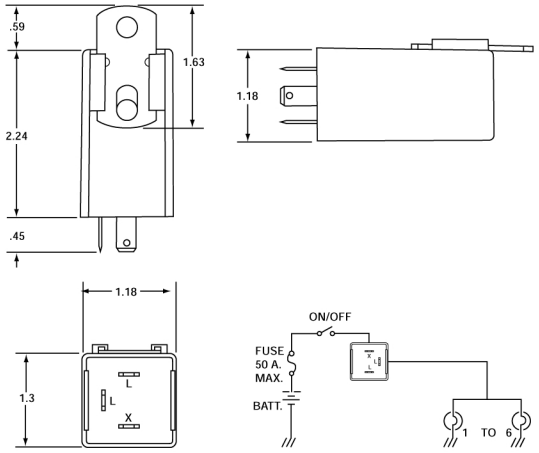

DIMENSIONS IN INCHES

Application:

- EMERGENCY VEHICLE FLASHER APPLICATIONS
  - Light Bars, Running Lights, Grill Lights
  - Six Lamps Per Side, Maximum of 160 Watts Per Side
  - All Vehicle Alternating Lights Controlled by One Flasher

Design Life:

- 500 Hours

Technology vs. Design Life vs. Lamp Load

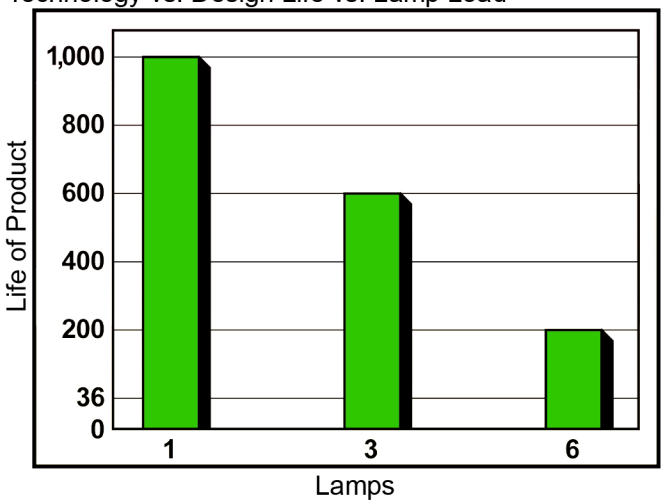

CHARACTERISTIC	MIN	MAX	UNIT
Load Rating	1	6	Lamps
Flash Rate	60	120	Flash/min
Duty Cycle	35	75	%
Time to First Flash		1.0	Seconds
Voltage Drop		.45	V @ Max Load
Voltage Range	10	16	Volts
Temperature Range	-40	+85	Degrees C

LEDLight.com LLC
12215 East Chandler Heights Rd Chandler, AZ 85249
Toll Free 1(877)283-5060 Local 1(602)997-0366 Fax 1(602)861-4088