




LEDLight.com

S25 12 SMT Tower LED Light

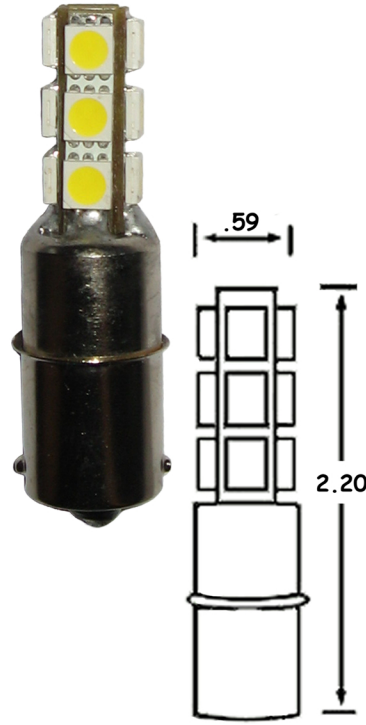

120 Lumen output, 240 mA current @ 12 VDC. 2.69 Watt input consumption, 25 Watt equivalent output. 6000-6500 Kelvin Super White or 3000-3500 Kelvin Warm White. 10,000 hour life. 180 Degree viewing angle. Operating voltage 12V VDC. 2 inches in length. High tech heat sink to make the LED Light last longer. Designed for automotive, RV and marine uses along with many others. Now with Warm White and BA15D base configurations for RVs and boats. 1156 replaces BA15S T25 T-25 1073 1093 1129 1141 1159 1259 1295 1383 1459 1619 1651 1680 2056 3496 5007 5008 7008 7506 7806 7527 1156 1759 3497 1156-18W 67 89 97 1156 12821 P21W LOW 61 63 67 #67 69 71 81 89 97 98 303 623 1003 1155 1247 1251 3497 5007 5008 12821 P21W. 1157 replaces BAY15D 2057 2357 2397 7528 3496. BA15D replaces 90 1004 1076 1142.

Part#	34344
Part Description	S25 12 SMT Tower
Lamp Type	SMD
Lamp Base	BA15S, BA15D BAY15D
Unit Wattage	2.35(9PCS) 3.17(12PCS)
Voltage	12V
Frequency	50-60Hz
Operating Temperature	65°C
Environment Temperature	below 25°C
Operating Humidity	0-95% non-condensity humidity
IP Class	IP4/3
Ventilation	Good Ventilation
Weight	25g
Size	55
Package Type	1 PC
Number/ Carton	
Carton Size	
Certificates	RoHS
Lense Type	
Body Type	Cu
Work Environment	Indoor
Luminous Efficacy	
Lumen Maintenance	
LED Life	10,000hrs
Warranty	1 Year

Color	Beam Angle	Forward Lumen	Side Lumen	# of LEDs	# of chips per LED	LED Type	Kelvin	Wave Length	Amps	LED Watts	Unit Watts	CRI
W	180	90(9pcs) 120(12pcs)		9/12	3	Hongli	6000-6500k	170-180mA 230-240mA	170-180mA 230-240mA	2.00W 2.69W	2.35W 3.17W	80%
DW												
WW	180	70(9pcs) 100(12pcs)		9/12	3	Hongli	3000-3500k	170-180mA 230-240mA	170-180mA 230-240mA	2.00W 2.69W	2.35W 3.17W	80%
R												
G												
B												
Y												
UV												
RGB												

LEDLight.com LLC

12215 East Chandler Heights Rd Chandler, AZ 85249

Toll Free 1(877)283-5060 Local 1(602)997-0366 Fax 1(602)861-4088