




LEDLight.com

EL13A-2 - 12Volt Alternating Flasher

- Socket Mountable
- Precise Square Wave I.C. Controller
- High Temperature Plastic Enclosure
- Standard Three Terminal I.S.O. Pin-out
- Solid State Relay Driver Technology
- Highest O.E.M. Quality Printed Circuit Board Materials
- Quality and Durability Equal to O.E.M. Products

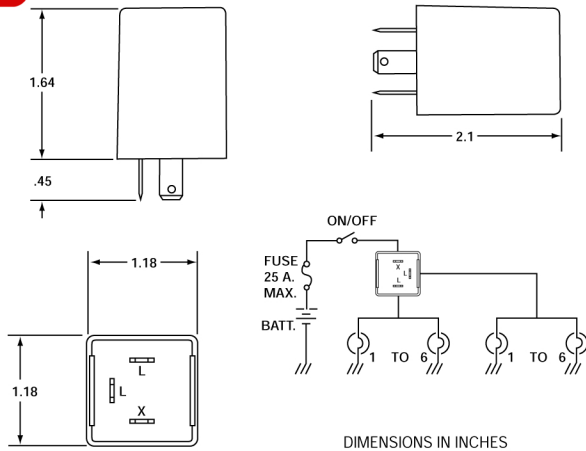


Application:

- POLICE VEHICLE FLASHER APPLICATIONS
 - Head Lamp "Wig/Wag"
 - Light Bars, Running Lights, Deck Lights, Grill Lights
 - Six Lamps Per Side, Maximum of 150 Watts Per Side
 - All Vehicle Alternating Lights Controlled by One Flasher

Design Life:

- 400 Hours

Technology vs. Design Life vs. Lamp Load

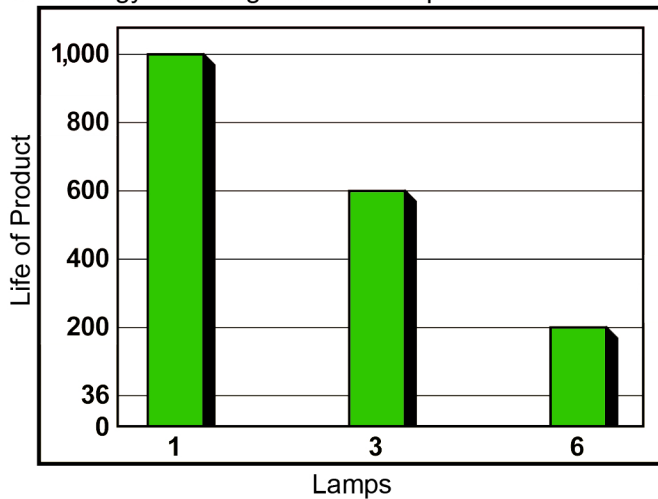

CHARACTERISTIC	MIN	MAX	UNIT
Load Rating	1	6	Lamps
Flash Rate	60	120	Flash/min
Duty Cycle	35	75	%
Time to First Flash		1.5	Seconds
Voltage Drop		.45	V @ Max Load
Voltage Range	10	16	Volts
Temperature Range	-40	+85	Degrees C