




LEDLight.com

EP37-High Lamp Load Flasher

- Bracket or Socket Mountable
- 16 Lamp, 432 Watt Load Capability
- Precise Square Wave I.C. Controller
- Two Terminal Standard I.S.O. Pin-out
- High Temperature Plastic Enclosure
- Solid State Relay Driver Technology
- High Quality O.E.M. Printed Circuit Board Materials
- Quality and Durability Equal to O.E.M. Products
- Meets or Exceeds D.O.T. Requirements

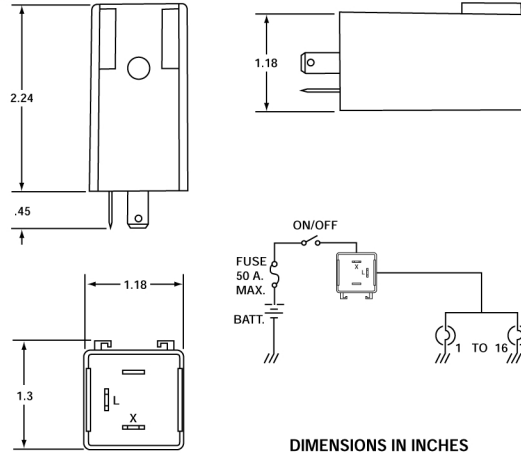


Application:

- School Bus
- Emergency Vehicles
- Tractor Trailer Rigs
- LED Compatible

Design Life:

- 200 Hours at Maximum Design Load

Technology vs. Design Life vs. Lamp Load

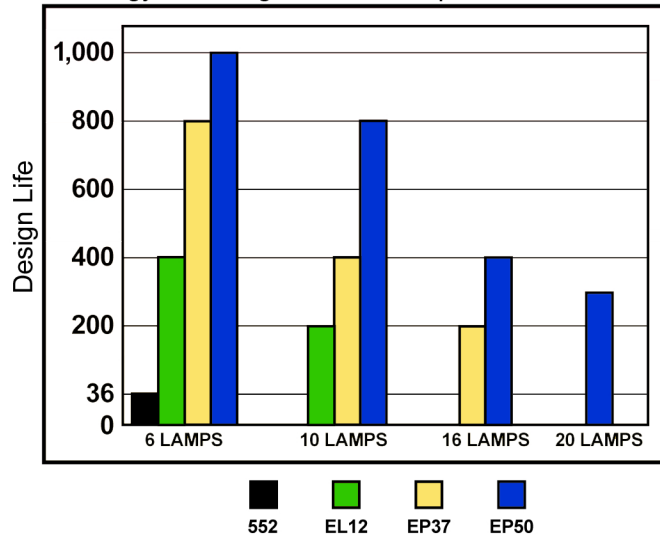

| CHARACTERISTIC | MIN | MAX | UNIT |
|---------------------|-----|-----|--------------|
| Load Rating | < 1 | 16 | Lamps |
| Flash Rate | 60 | 120 | Flash/min |
| Duty Cycle | 35 | 75 | % |
| Time to First Flash | | 1.5 | Seconds |
| Voltage Drop | | 0.8 | V @ Max Load |
| Voltage Range | 9 | 16 | Volts |
| Temperature Range | -40 | +85 | Degrees C |