




LEDLight.com

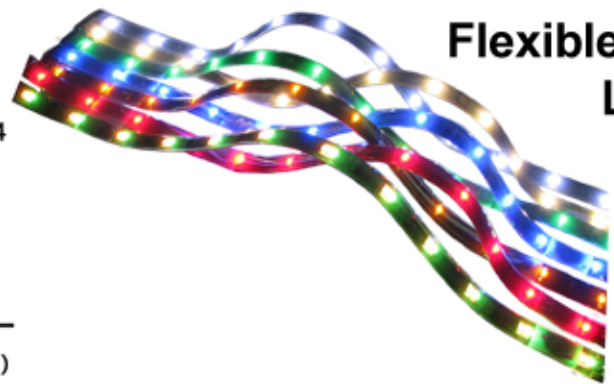

Flexible 24 Inch LED 1210 SMT Light Low Voltage 12 Volt DC

Flexible LED Light has two sided tape so just remove and stick into place. The LEDs are spaced at 1 per inch. White at 12" is 30 Lumens, 24" 40 Lumens, 48" 47 Lumens. Each color has a different Lumen output, watt consumption, and current consumption. Available in white 6000 Kelvin, warm white 3000 Kelvin, red (630nm-780nm), green (500nm-570nm), blue (420-470), yellow/amber (570-600), and RGB. Using a RGB controller, you can have sync color changing. Each 12" length uses 80mA of current at 12 VDC.

| | |
|-------------------------|----------------------|
| Part# | 63459 |
| Part Description | Flexible LED Light |
| Lamp Type | LED strips |
| Lamp Base | |
| Unit Wattage | |
| Voltage | 12V |
| Frequency | 50-60Hz |
| Operating Temperature | -20°C -60°C |
| Environment Temperature | -20°C -40°C |
| Operating Humidity | 0-95% non-condensing |
| IP Class | IP65 |
| Ventilation | |
| Weight | |
| Size | 24 inch |
| Package Type | white box |
| Number/ Carton | |
| Carton Size | |
| Certificates | CE ROHS |
| Lense Type | |
| Body Type | |
| Work Environment | |
| Luminous Efficacy | |
| Lumen Maintenance | |
| LED Life | 10,000 hours |
| Warranty | 1 year |

| Color | Beam Angle | Forward Lumen | Side Lumen | # of LEDs | # of chips per LED | LED Type | Kelvin | Wave Length | Amps | LED Watts | Unit Watts | CRI |
|-------|------------|---------------|------------|-----------|--------------------|----------|------------|-------------|-------|-----------|------------|-----|
| W | 160 | 84 | | 24 | | SMD1206 | 6000-7000K | | 144mA | 1.728W | 2.074W | |
| DW | | | | | | | | | | | | |
| WW | 160 | 60 | | 24 | | SMD1206 | 2800-3300K | | 144mA | 1.728W | 2.074W | |
| R | 160 | 31.2 | | 24 | | SMD1206 | | 630-780 | 96mA | 1.152W | 1.382W | |
| G | 160 | 72 | | 24 | | SMD1206 | | 500-570 | 144mA | 1.728W | 2.074W | |
| B | 160 | 31.2 | | 24 | | SMD1206 | | 420-470 | 144mA | 1.152W | 1.382W | |
| Y | 160 | 31.2 | | 24 | | SMD1206 | | 570-600 | 96mA | 1.728W | 2.074W | |
| UV | | | | | | | | | | | | |
| RGB | | | | | | | | | | | | |

LEDLight.com LLC
 12215 East Chandler Heights Rd Chandler, AZ 85249
 Toll Free 1(877)283-5060 Local 1(602)997-0366 Fax 1(602)861-4088