
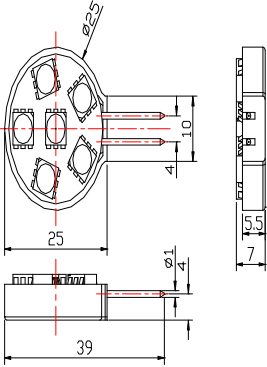




|                       |                                     |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
|-----------------------|-------------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|-------|------------|---------------|------------|----------|-------------------|----------|------------|-------------|-----------|-----------|------------|-----|
| Part#                 | 78744W                              | <div style="text-align: center;">  <p><b>LEDLight.com</b></p> </div> <p style="text-align: right;">G4 6 SMT 3Chips LED 12VAC/DC GX4.0 Side Firing G4 led bulb is no UV,IR or other deleterious radiation .It is a plastic cover to protect the parts on the back of the bulb</p> <div style="display: flex; justify-content: space-around; align-items: center;">    </div> <p style="text-align: center;">UNIT: mm</p> |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Part Description      | G4 6 SMT 3Chips LED 12VAC           |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Lamp Type             | Widely used in ships, advertisement |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Lamp Base             | G4                                  |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Unit Wattage          | 0.65watt@12VAC                      |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Voltage               | 12VAC                               |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Frequency             |                                     |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Operating Temperature | -30°C to +75°C                      |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Storage Temperature   | -40°C to +100°C                     |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Operating Humidity    | 40%to70%                            |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| IP Class              | n/a                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Ventilation           | Open air                            |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Weight                | 2.8G                                |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Size                  | 25*39mm                             |  |  |  |  |  |  |  |  |  |  |  |  |  | Color | Beam Angle | Forward Lumen | Side Lumen | #of LEDS | #of chips per LED | LED Type | Kelvin     | Wave Length | Unit Amps | LED Watts | Unit Watts | CRI |
| Package Type          | Bag,Card Package                    |  |  |  |  |  |  |  |  |  |  |  |  |  | W     | 120 Degree | 80LM          |            | 6smd     | 3                 | 5050     | 6000-6500K |             | n/a       | 0.2       |            | n/a |
| Number/Carton         | n/a                                 | DW   |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Carton Size           | 54*28.5*25.5mm                      | WW   |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Certificates          |                                     | R  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Lense Type            | no lens                             | G  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Body Type             | n/a                                 | B  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Work Environment      |                                     | Y  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Luminous Efficacy     | 4000-6000MCD                        | UV   |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Lumen Maintenance     | 80LM                                | RGB  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| LED Life              | 30000 Hours                         | <p>LEDLight.com,LLC<br/>sales@ledlight.com<br/>Toll Free 1(877)283-5060 Local 1(602)997-0366 Fax 1(602)861-4088</p>  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |
| Warranty              | See website for more information    |  |  |  |  |  |  |  |  |  |  |  |  |  |       |            |               |            |          |                   |          |            |             |           |           |            |     |