


Part#	23598
Part Description	1156
Lamp Type	1156
Lamp Base	BA15D
Unit Wattage	1.28W
Voltage	12V & 24V
Frequency	
Operating Temperature	-20~ +80
Environment Temperature	-25~ +85
Operating Humidity	
IP Class	
Ventilation	
Weight	
Size	25mm
Package Type	Blister Card
Number/ Carton	400sets
Carton Size	
Certificates	
Lense Type	Water Clear
Body Type	
Work Environment	
Luminous Efficacy	
Lumen Maintenance	
LED Life	60,000hrs
Warranty	1 year



LEDLight.com

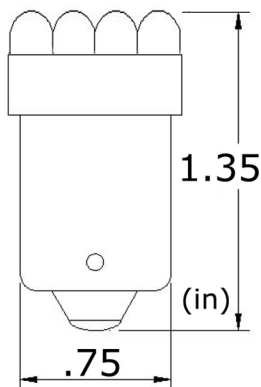

8 LED Light

G18 LED Light. 8 LEDs 8 forward firing. Available in super white, red, yellow, green and blue. 12 VDC. Single circuit BA15S base and dual circuit BA15D base. 20mA@12VDC. 1.35 Inches in overall length and 0.75 Inches in width. 1156 replaces BA15S T25 T-25 1073 1093 1129 1141 1159 1259 1295 1383 1459 1619 1651 1680 2056 3496 5007 5008 7008 7506 7806 7527 1156 1759 3497 1156-18W 67 89 97 1156 12821 P21W LOW 61 63 67 #67 69 71 81 89 97 98 303 623 1003 1155 1247 1251 3497 5007 5008 12821 P21W BA15D replaces 90 1004 1076 1142

Color	Beam Angle	Forward Lumen	Side Lumen	# of LEDs	# of chips per LED	LED Type	Kelvin	Wave Length	Amps	LED Watts	Unit Watts	CRI
W 	15°	5000-18000		8	1	round	6500-8000K		20mA			
DW 	15°	6000-20000		8	1	round	5000-7000K		20mA			
WW 	15°	6000-20000		8	1	round	3500-5000K		20mA			
R 	15°	3500-7000		8	1	round		660nm	20mA			
G 	15°	3500-7000		8	1	round		505nm	20mA			
B 	15°			8	1	round		450nm	20mA			
Y 	15°	3500-7000		8	1	round		585nm	20mA			
UV 	15°			8	1	round		405nm	20mA			
RGB 												

LEDLight.com LLC

12215 East Chandler Heights Rd Chandler, AZ 85249

Toll Free 1(877)283-5060 Local 1(602)997-0366 Fax 1(602)861-4088