



31245

Electrical Specifications:

LED Power: 120W
Lamp's Power: 135W
Operating Voltage: 100-240V AC, 50/60Hz
Optimal Operating Temp: -30 °C to +50 °C
Operating Humidity: 10% to 90%
Power Fact(PF): > 0.95
Power Supply Efficiency: > 90%

Photometric Specification

LED Luminous Flux: 13200 lm in Initial
 12000 lm in Maintain
LED Luminous Efficiency: Up to 140 lm/w
CRI: Ra >= 80

CCT:




Mechanical Specifications

IP Rating: IP66
Guarantee: 3 years
Heat Radiator: Anodized Aluminum
Face: Plastics
Fixture Dimensions: 395 x445 x190 mm
Fixture Weight: 8.9 kg


Packing Information:

Packing Type: Carton packaging; 1 unit /ctn.
Packing Dimension: 445 x495 x220 mm
Packing Weight: 11.0 kg

ISO-Illuminance Curve

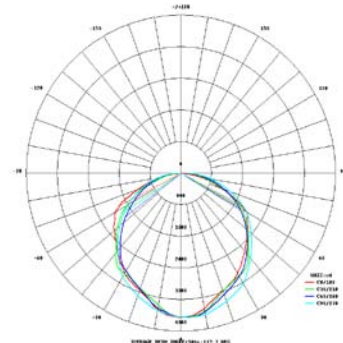

FGĖÁ æŦP ä @Ŧæ ŠŦÖŠä @

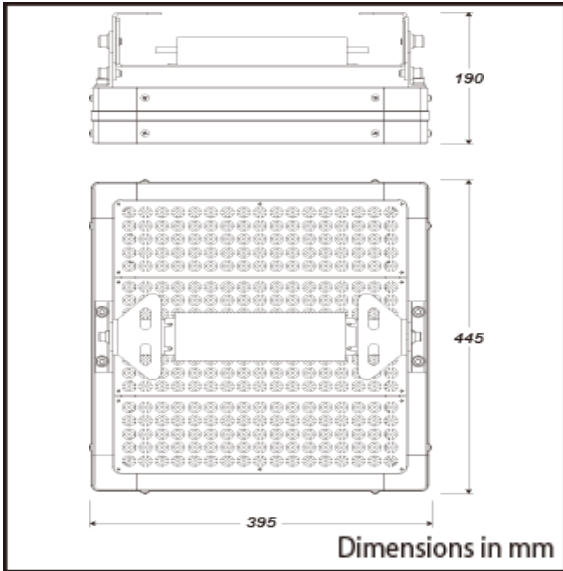

Illumination Information:



Height	Effective Illuminated Area:	Center Illumination (E):	Average Illumination (E):
A=6m	Φ 6.9m	142.3 lux	86.8 lux
B=7m	Φ 8.1m	104.6 lux	63.7 lux
C=8m	Φ 9.2m	80.1 lux	48.8 lux



Height	Effective Illuminated Area:	Center Illumination (E):	Average Illumination (E):
A=6m	Φ 16m	101.2 lux	35.3 lux
B=7m	Φ 18m	74.4 lux	25.9 lux
C=8m	Φ 21m	57.0 lux	19.8 lux

LED High Bay Lights
 for Industrial & Commercial Applications