










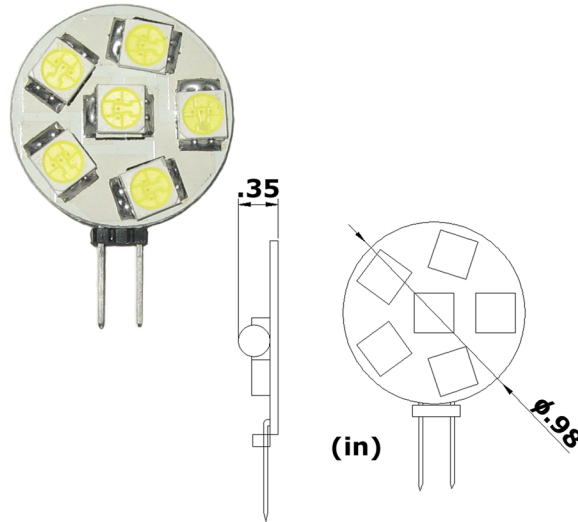


LEDLight.com

G4 Ultra Bright 6 SMT LED Light 12 Volt AC/DC



52 Lumen output. Comparable to a 15W Halogen equivalent. 1.1 Watt power consumption. 150 mA current consumption. Available in white 6500 Kelvin or warm white 3000 Kelvin. Long life of 50,000 hours. 110 Degree viewing angle. GX4.0 base. Operating voltage 12V AC or 12V DC. 1.0 inch diameter x 0.56 inch height. No ultra-violet (UVA, UVB) or radiofrequency (RF) energy. Can be dimmed with a variable AC or DC voltage supply. One per package.

Part#	35263
Part Description	6pcs, 5mm LED
Lamp Type	LED
Lamp Base	GX4.0
Unit Wattage	1.1W
Voltage	12V
Frequency	50-60Hz
Operating Temperature Environment	-40~60°
Operating Temperature Humidity	30° Ta=60° RH=90%
IP Class	IP10
Ventilation	
Weight	8g
Size	31x38x14mm
Package Type	white box
Number/ Carton	75pcs
Carton Size	21x14x8cm
Certificates	CE, RoHS
Lense Type	
Body Type	5050 chip
Work Environment	
Luminous Efficacy	52lm
Lumen Maintenance	W 47lm
LED Life	50,000hrs
Warranty	1 year

Color	Beam Angle	Forward Lumen	Side Lumen	# of LEDs	# of chips per LED	LED Type	Kelvin	Wave Length	Amps	LED Watts	Unit Watts	CRI
W 	110°	52lm		6	1	5050 SMD	6500K			1.1	0.06	
DW 												
WW 												
R 												
G 												
B 												
Y 												
UV 												
RGB 												

LEDLight.com LLC

12215 East Chandler Heights Rd Chandler, AZ 85249

Toll Free 1(877)283-5060 Local 1(602)997-0366 Fax 1(602)861-4088