



65478

Electrical Specifications:

LED Power: 90W
Lamp's Power: 100W
Operating Voltage: 100-240V AC, 50/60Hz
Optimal Operating Temp: -30 °C to +50 °C
Operating Humidity: 10% to 90%
Power Fact(PF): > 0.95
Power Supply Efficiency: > 90%

Photometric Specification

LED Luminous Flux: 9900 lm in Initial
 9000 lm in Maintain
LED Luminous Efficiency: Up to 140 lm/w
CRI: Ra >= 80

CCT:

3000-3500K

4000-4500K

5000-5500K


6000-6500K

Mechanical Specifications

IP Rating: IP66
Guarantee: 5 Years
Heat Radiator: Anodized Aluminum
Face: Plastics
Fixture Dimensions: 395 x360 x190 mm
Fixture Weight: 7.4 kg



JEY æP ä @Óæ ŠÖÖŠä @

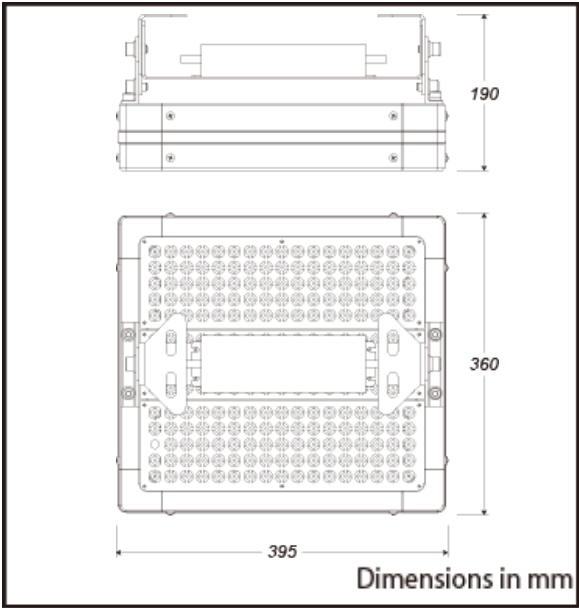

Illumination Information:




Height	Effective Illuminated Area:	Center Illumination (E):	Average Illumination (E):
A=5m	Φ 5.8m	159.3 lux	97.0 lux
B=6m	Φ 6.9m	110.6 lux	67.4 lux
C=7m	Φ 8.1m	81.3 lux	49.5 lux



Height	Effective Illuminated Area:	Center Illumination (E):	Average Illumination (E):
A=5m	Φ 13m	112.7 lux	39.1 lux
B=6m	Φ 16m	78.2 lux	27.2 lux
C=7m	Φ 18m	57.5 lux	20.0 lux

ISO-Illuminance Curve

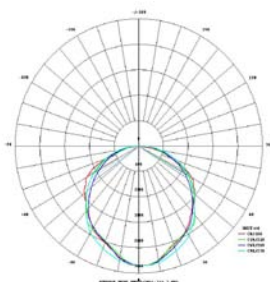

LED High Bay Lights
 for Industrial & Commercial Applications

