


Part#	67342
Part Description	Flexible LED Light
Lamp Type	LED strips
Lamp Base	
Unit Wattage	
Voltage	12V
Frequency	50-60Hz
Operating Temperature	-20°C -60°C
Environment Temperature	-20°C -40°C
Operating Humidity	0-95% non-condensing
IP Class	IP65
Ventilation	
Weight	
Size	48 inch
Package Type	white box
Number/ Carton	
Carton Size	
Certificates	CE ROHS
Lense Type	
Body Type	
Work Environment	
Luminous Efficacy	
Lumen Maintenance	
LED Life	10,000 hours
Warranty	1 year



LEDLight.com

Flexible 48 Inch Red/Green/Blue 1210 SMT LED Light Common Anode Low Voltage

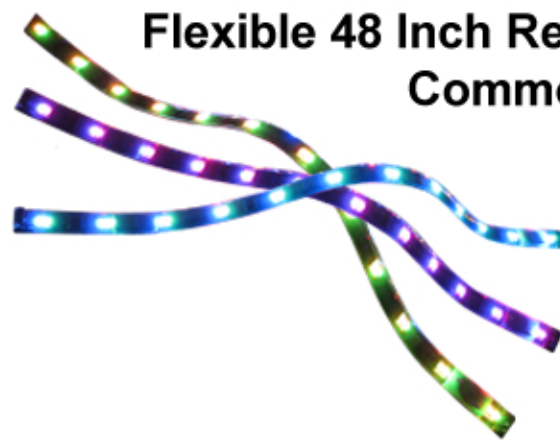

Flexible LED Light has two sided tape so just remove and stick into place. The LEDs are spaced at 1 per inch. White at 12" is 30 Lumens, 24" 40 Lumens, 48" 47 Lumens. Each color has a different Lumen output, watt consumption, and current consumption. Available in white 6000 Kelvin, warm white 3000 Kelvin, red (630nm-780nm), green (500nm-570nm), blue (420-470), yellow/amber (570-600), and RGB. Using a RGB controller, you can have sync color changing. Each 12" length uses 80mA of current at 12 VDC.

Color	Beam Angle	Forward Lumen	Side Lumen	# of LEDs	# of chips per LED	LED Type	Kelvin	Wave Length	Amps	LED Watts	Unit Watts	CRI
W	160	168		48		SMD1206	6000-7000K		288mA	3.456W	4.148W	
DW												
WW	160	120		48		SMD1206	2800-3300K		288mA	3.456W	4.148W	
R	160	62.4		48		SMD1206		630-780	192mA	2.304W	2.764W	
G	160	144		48		SMD1206		500-570	288mA	3.456W	4.148W	
B	160	62.4		48		SMD1206		420-470	288mA	2.304W	2.764W	
Y	160	62.4		48		SMD1206		570-600	192mA	3.456W	4.148W	
UV												
RGB												

LEDLight.com LLC
12215 East Chandler Heights Rd Chandler, AZ 85249
Toll Free 1(877)283-5060 Local 1(602)997-0366 Fax 1(602)861-4088