


PART NO.	NO. OF TERMINALS	TYPE	STYLE	Volt Capacity
68934	3	LED	Round	6 V

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL

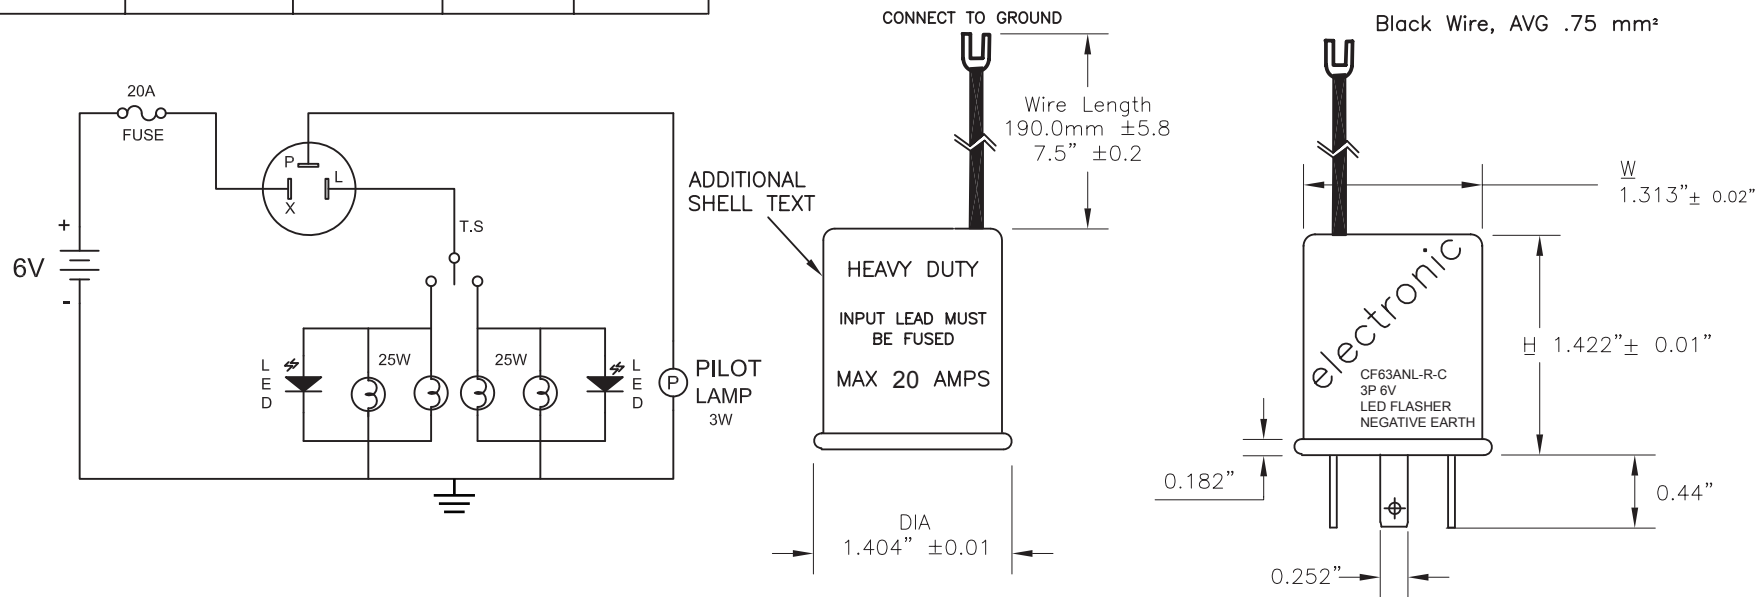

Shell Construction: Plastic

Rated Load: 0.1 Amp to 20 Amp self-adjusting to lamp amperage draw.

Lamp Ratings: 0.1 Amp to 20 Amps

Temperature Operating Range: -25°F to 140° F

Rated Voltage: 5 to 7 Volts DC.

Voltage Drop at Rated Current: 500 mv

Time to First Flash: Less than 1.5 seconds.

Flash Rate over Temperature Range: 60 to 120 Flash Per Minute

Duty Cycle: 30% to 75%


Electrical Source: Special Note: External Wire Provides Ground

20 amps. Input Lead must be fused.

L Terminal = Load (Lamp Output)

X Terminal = Battery (Power Input)

P Terminal = Pilot Lamp

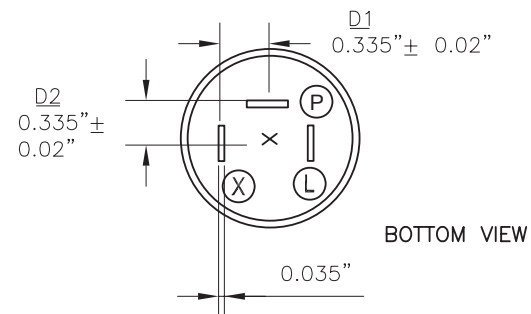

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS .XX ± .05 .XXX ± .010 FRACTIONAL ± 1/64		LEDLight.com			
		TITLE ELECTRONIC FLASHER 68934			
DRAWN D. C.	DATE 9 / 17 / 2015	SIZE A	FSCM NO.	DWG NO. 68934	REV 1
CHECKED		SCALE	PLOT SCALE	SHEET 1 OF 1	
DESIGN		FILE 68934 .DWG	DO NOT SCALE DRAWING		
MATERIAL					