




LEDLight.com

S25 12 SMT Forward Firing LED Light

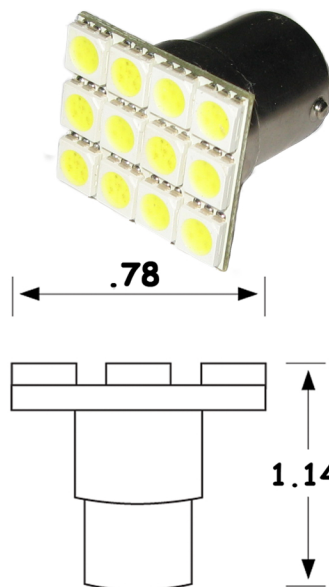

Uses 2.69 Watt input power consumption. Has an estimated light output of 21 Watts at 120 Lumens. Operating voltage 12 VDC, operating current 0.240 Amps. 120 Degree viewing angle. Available in super white and warm white. Measures 1.15 inches from top to bottom and the square measure 1 inches x 1 inches. This LED Light has a high tech heat sink designed for the auto, RV and marine environment to help the LED's operate cooler. No UV light, makes lenses and the area that is illuminated last longer. Use less power and save energy, and less UV damage. 1156 replaces BA15S T25 T-25 1073 1093 1129 1141 1159 1259 1295 1383 1459 1619 1651 1680 2056 3496 5007 5008 7008 7506 7806 7527 1156 1759 3497 1156-18W 67 89 97 1156 12821 P21W LOW 61 63 67 #67 69 71 81 89 97 98 303 623 1003 1155 1247 1251 3497 5007 5008 12821 P21W. 1157 replaces BAY15D 2057 2357 2397 7528 3496. BA15D replaces 90 1004 1076 1142.

Part#	74545
Part Description	S25 12 SMT Forward Firing
Lamp Type	SMD
Lamp Base	BA15S, BA15D, BAY15D
Unit Wattage	2.35(9PCS) 3.17(12PCS)
Voltage	12V
Frequency	50-60Hz
Operating Temperature	65°C
Environment Temperature	below 25°C
Operating Humidity	0-95% non-condensity humidity
IP Class	IP4/3
Ventilation	Good Ventilation
Weight	25g
Size	28
Package Type	1 PC
Number/ Carton	
Carton Size	
Certificates	RoHS
Lense Type	
Body Type	Cu
Work Environment	Indoor
Luminous Efficacy	
Lumen Maintenance	
LED Life	10,000hrs
Warranty	1 Year

Color	Beam Angle	Forward Lumen	Side Lumen	# of LEDs	# of chips per LED	LED Type	Kelvin	Wave Length	Amps	LED Watts	Unit Watts	CRI
W 	120	90(9pcs) 120(12pcs)		9/12	3	Hongli	6000-6500k	170-180nm 230-240nm	2.00W 2.69W	2.35W 3.17W	80%	
DW 												
WW 	120	70(9pcs) 100(12pcs)		9/12	3	Hongli	3000-3500k	170-180nm 230-240nm	2.00W 2.69W	2.35W 3.17W	80%	
R 												
G 												
B 												
Y 												
UV 												
RGB 												

LEDLight.com LLC

12215 East Chandler Heights Rd Chandler, AZ 85249

Toll Free 1(877)283-5060 Local 1(602)997-0366 Fax 1(602)861-4088