


## Instruction Manual


### Integrated led tube



8 pcs tubes can be connected up together by Inter-linkable cable

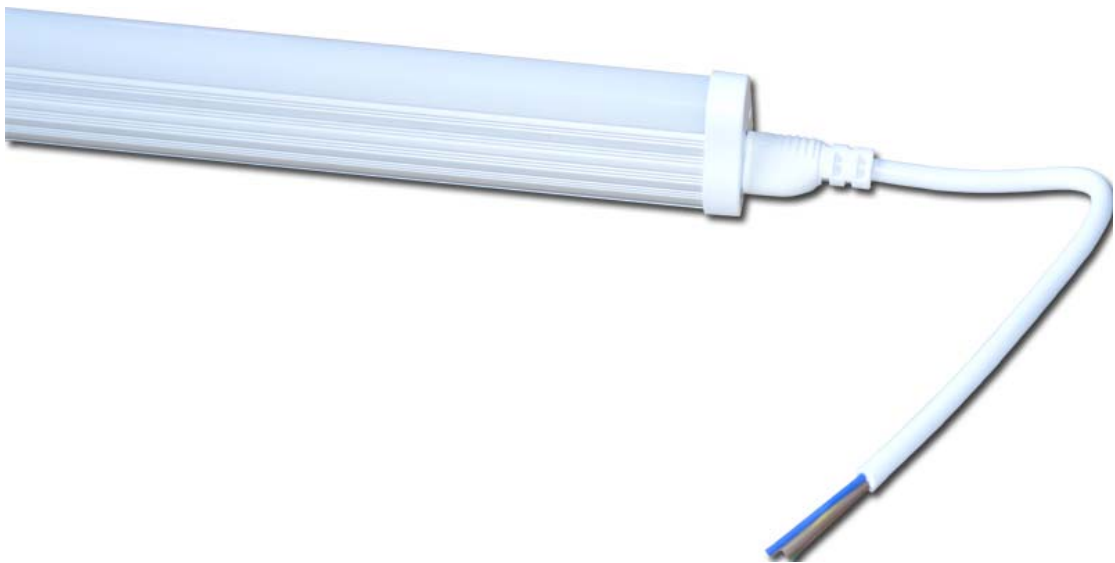

8 pcs tubes can be connected up together by the Inter-linkable connector

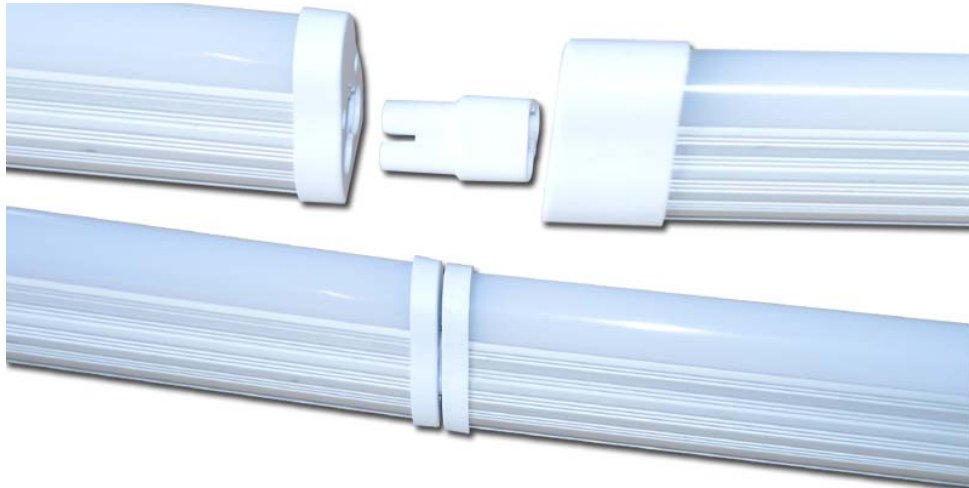


Website: [www.ledlight.com](http://www.ledlight.com)

E-mail: [sales@ledlight.com](mailto:sales@ledlight.com)

Tel: 18772835060



## Installation:

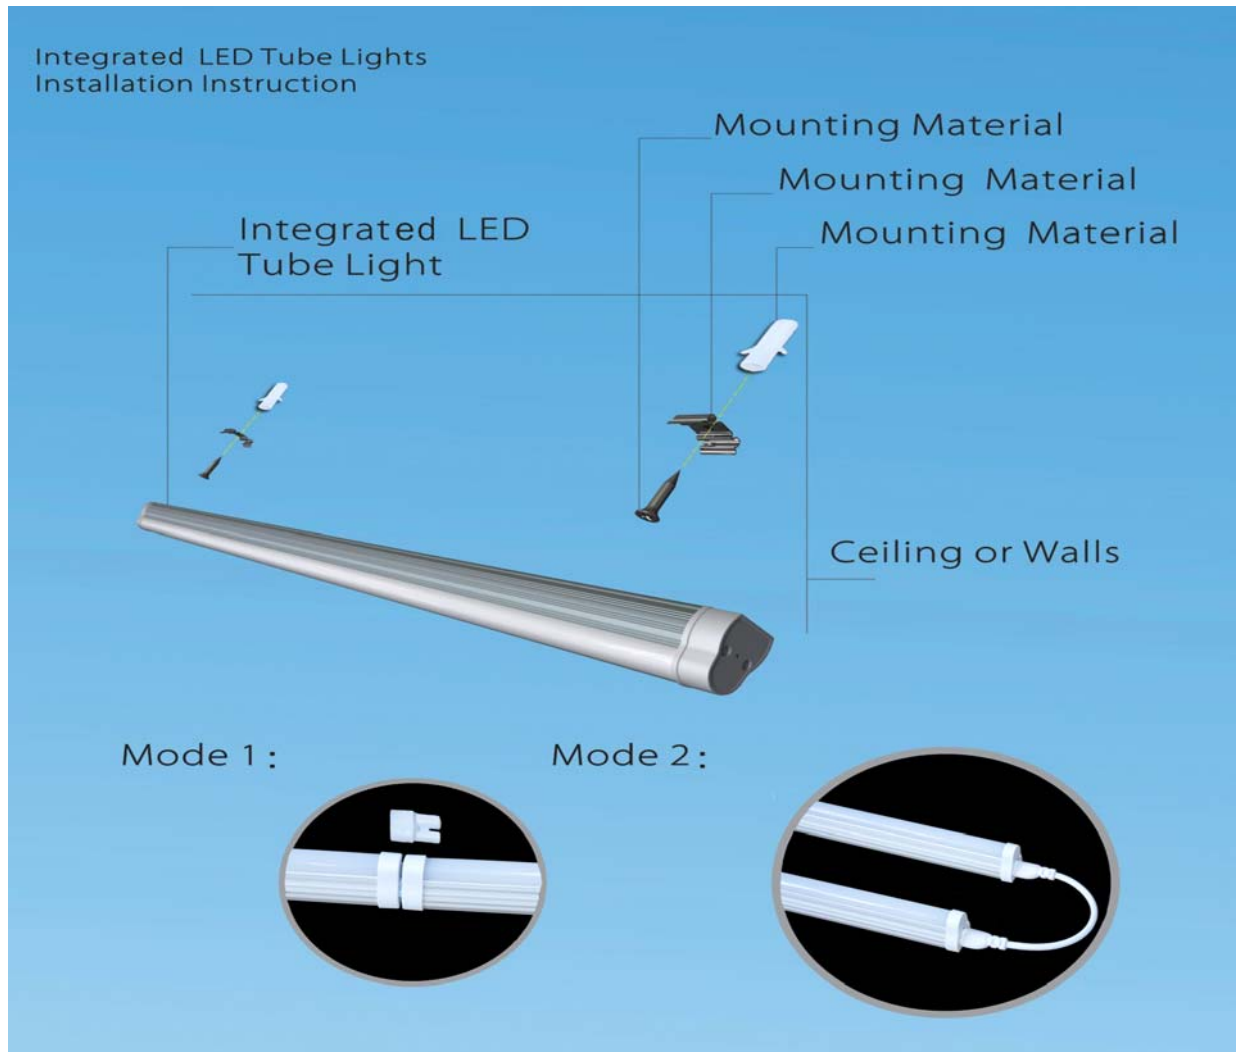



Website: [www.ledlight.com](http://www.ledlight.com)

E-mail: [sales@ledlight.com](mailto:sales@ledlight.com)

Tel: 18772835060



Inter-linkable cable:the length is customized by customers.

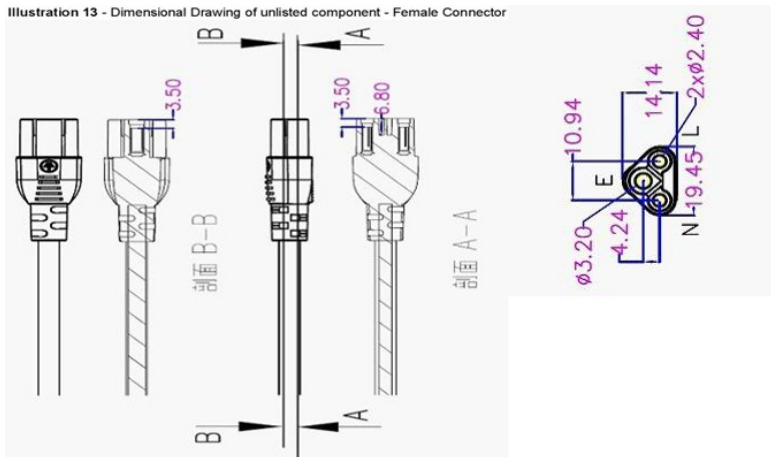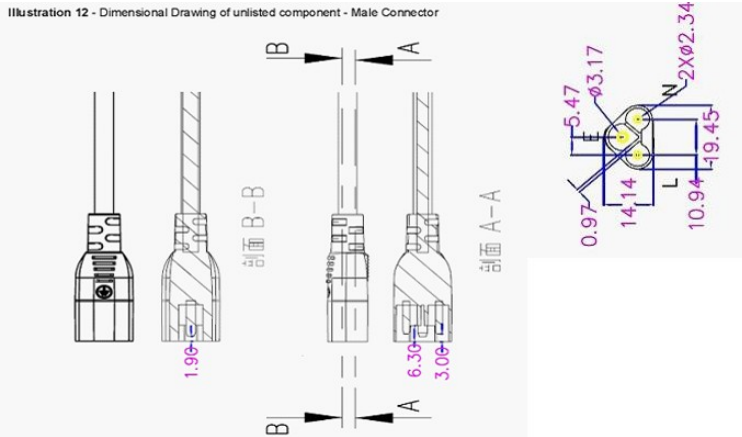


Website:[www.ledlight.com](http://www.ledlight.com)

E-mail:[sales@ledlight.com](mailto:sales@ledlight.com)


Tel:18772835060



**Inter-linkable connector:**

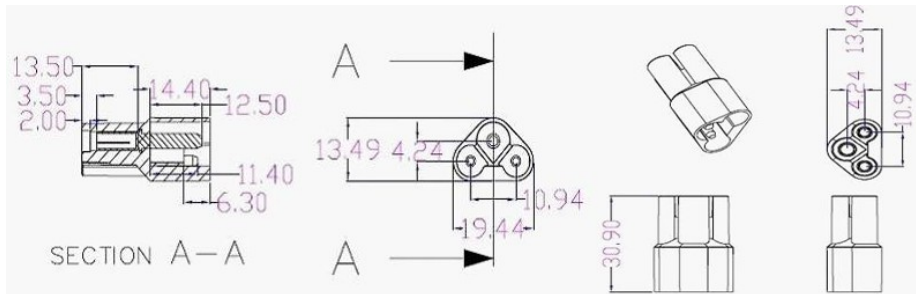

**Accessories:**

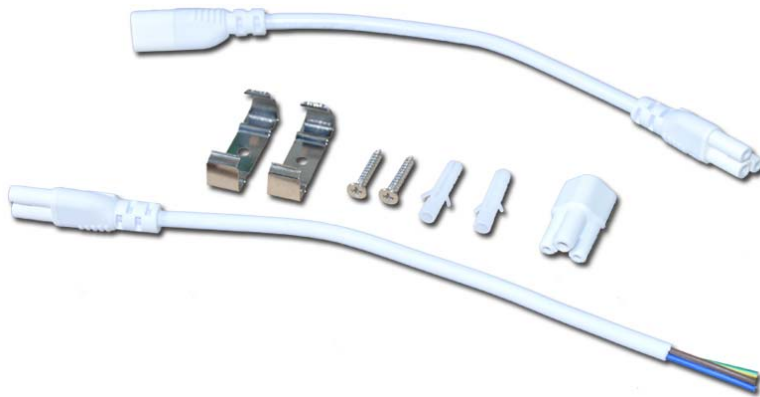

Website: [www.ledlight.com](http://www.ledlight.com)

E-mail: [sales@ledlight.com](mailto:sales@ledlight.com)

Tel: 18772835060



Specification:

Product Code:93845

LED Model:SMD3014 Epistar ship

Power Consumption:15W

Color Temperature:4800K/6000K

Luminous Flux:1350LM(Milky Cover)

Frequency:60Hz

Power Factor:0.95

Power Efficiency:85%

Input Voltage:120V

LED Qty:156 pcs

Insolated Driver

Weight:490g


Main Material:PC Optics and Aluminum

Socket :lead in wire

Male-Female Joint-Plug

One leds of 0.1w. The lumen is 10-12 lm.

Dimension(inches):

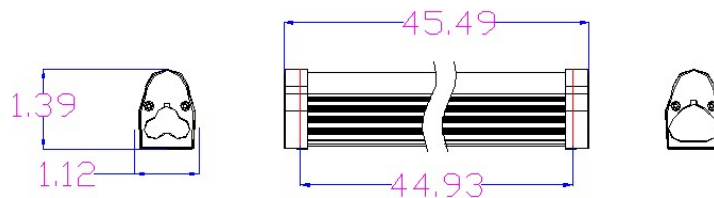

Website:[www.ledlight.com](http://www.ledlight.com)

E-mail:[sales@ledlight.com](mailto:sales@ledlight.com)

Tel:18772835060



