




LEDLight.com

Radio Controlled Red/Green/Blue 3 Channel Controller

3 channel RGB constant control, the max current of each channel up to 5A. Multi-mode to select given color stays on or off. You can also adjust the brightness from 0 to 100% each color, has a 16 scale speed. RGB controller is mini-size and is easy to connect wires. Radio Controlled RGB Controller. Up to 150 foot wireless operation. Can be used with 12 VDC tube lights and flexible strips, our 12 VDC automotive lights, or your own 12 VDC light source. 5 amps per channel. The controller operates 12 VDC. Works great in applications of business spaces, airports, subways, lighting for hospitals, hotels, marketplaces, dining-rooms, signboard and billboards, bars and clubs.

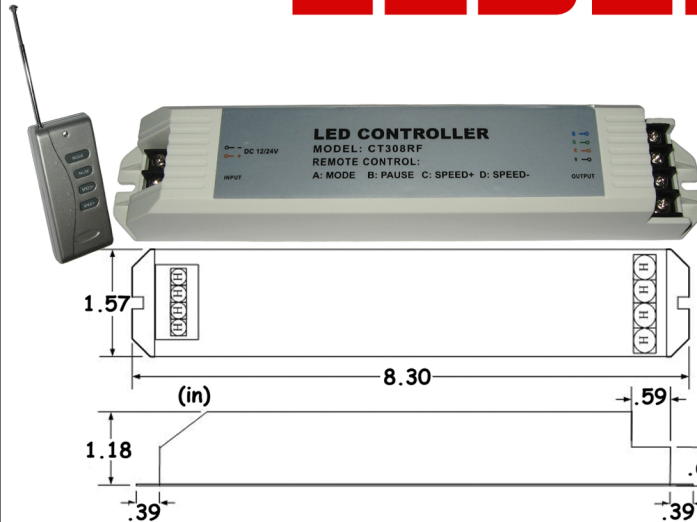

Part#	74324
Part Description	RGB Controller/ Wireless Remote
Lamp Type	LED Controller
Lamp Base	
Unit Wattage	AC 85-265V
Voltage	DC 12V
Frequency	
Operating Temperature Environment	-20°C-45°C
Operating Temperature Humidity	
IP Class	IP54
Ventilation	
Weight	150g
Size	21x40x30mm
Package Type	white box
Number/ Carton	50PCS
Carton Size	159x97x38cm
Certificates	CE
Lense Type	
Body Type	
Work Environment	
Luminous Efficacy	
Lumen Maintenance	
LED Life	
Warranty	1 year

Color	Beam Angle	Forward Lumen	Side Lumen	# of LEDs	# of chips per LED	LED Type	Kelvin	Wave Length	Amps	LED Watts	Unit Watts	CRI
W												
DW												
WW												
R												
G												
B												
Y												
UV												
RGB												

LEDLight.com LLC
 12215 East Chandler Heights Rd Chandler, AZ 85249
 Toll Free 1(877)283-5060 Local 1(602)997-0366 Fax 1(602)861-4088